

RL4108 transmitter

Pro RL4000RH/T Series

Part of the **Hanwell Pro** RL4000RHT Series, the RL4108 combines temperature and humidity measurement using onboard sensors with the option of connecting a remote temperature probe. The instrument includes LCD display and 434.075MHz frequency as standard.



Temperature



Humidity



Radio transmitter



Features

- ✓ Combined temperature & humidity measurement
- ✓ LCD display with 33,333 data readings per channel & up to 2 years battery life
- ✓ Superior performance hardware & high accuracy sensors
- ✓ Easily accessible battery & USB socket
- ✓ Low power radio for long distance transmission (3km over open ground)
- ✓ Complies with RoHS, EU & WEEE directives
- ✓ Carries CE Marking

Typical Applications

- Dry storage
- Ambient room conditions
- Surface temperature

Always ask for a long-range signal strength test.



We can prove ours to be unrivalled.

Product code: RL4108-434.075

Instrumentation specification	
Dimension (Excl. ancillaries)	110 x 80 x 35mm
Weight	200 grams
Power supply	1 x 3.6V AA Lithium battery
Case material	ABS & PC
Memory capacity	33,333 readings per channel (unit will wrap when full)
Clock accuracy (logging)	20 ppm at 25°C
IP Rating	IP30
Instrument operating range	-20°C to +65°C in a non-condensing RH environment
Storage temperature	-40°C to +60°C
Resolution	0.1°C (temp), 0.1%RH (humidity)

Radio transmitter functions	
Frequency options	A range of frequencies are available between 433-458MHz. Country specific regulations apply.
Radio power	10mW
Radio range	3km over open ground
Battery life	Up to 2 years (dependent on conditions of use and instrument settings)
Software required	W900 – Standard EMS Software Package W906 – Validated EMS Software Package *See EMS datasheet for further options
Hardware required	CR2 / CR3 – Controller SR2 – Smart Receiver REP – Repeater

Accessories	
Y119	Wall mounting bracket
88706	AA Lithium battery

Ultimate peace of mind **RoHS**

Version 2 - EC180093

Disclaimer: The information contained herein is believed to be reliable. Hanwell Solutions Ltd. is not responsible for any incorrect or incomplete information on this datasheet and the information or product may be changed without notice. Customers should obtain and verify the latest relevant information before placing orders for Hanwell products.

hanwell.com


Tel: +44 (0)1462 688070 | Email: sales@hanwell.com

Sensor options

Onboard sensors (supplied with unit)

Internal temperature sensor	Precision Thermistor
Operating range	-20°C to +60°C (restricted by instrument operating range)
Accuracy	+/- 0.3°
Long term drift	< 0.1°C per year


Fixed relative humidity sensor	Capacitive Polymer
Operating range	10-90% RH non condensing
Accuracy	+/- 3% RH
Temperature dependence	<(0.025+0.0003xRH)[%RH/°C]



Additional sensors (supplied separately)

J095-3-05/J095-5-05 Remote precision thermistor probe 3mtr/5mtr (other cable lengths available)

Probe operating range	0°C to +125°C (restricted by instrument operating range)
Accuracy	+/- 0.1°C between -10°C to +40°C +/- 0.3°C outside these extremes
Long term drift	< 0.1°C per year

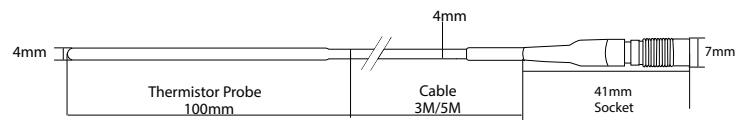

Y306-3-05/Y306-5-05 Remote precision thermistor surface probe (3mtr/5mtr)

Probe operating range	0°C to +125°C (restricted by instrument operating range)
Accuracy	+/- 0.1°C between -10°C to +40°C +/- 0.3°C outside these extremes
Long term drift	< 0.1°C per year

